

Configuration guide for Saturn 1000F2 Portable Flex

Dear customer,

We are pleased that you have chosen one of our terminals. We have already tested your Saturn 1000F2 Portable Flex extensively and prepared it for operation.

① **Please store this document carefully.** The information on your terminal will be needed in the event of service or subsequent initialisation.


{{ReceiptHeader}}	Terminal ID:	{{TerminalId}}
	ep2 Merchant-ID:	{{Ep2MerchantId}}
	Password:	{{TerminalPassword}}

Connect to Wi-Fi

① All selections and confirmations in the following images are made directly on the relevant terminal display.


① To connect to Wi-Fi, open the terminal menu. Choose <Settings>. Configure Wi-Fi on the terminal as indicated below.

Step 1

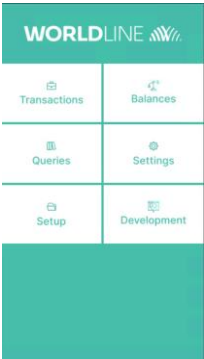

Select <Settings>.

Step 2

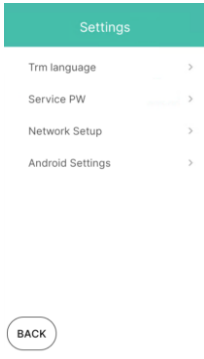


Select <Network Setup> and enter your merchant password.

Step 3




Select <Network & Internet> to configure the parameters in the Android Menu.

Step 4

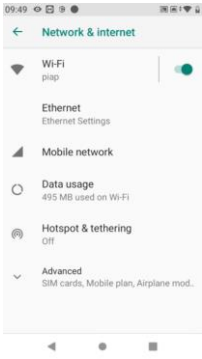


Select <Wi-Fi>.

Step 5

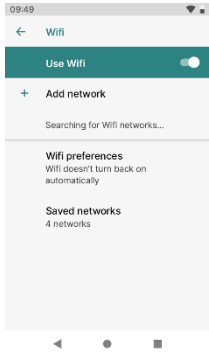


Activate Wi-Fi by clicking on <Use Wi-Fi> and click on <+ Add network>.

Step 6

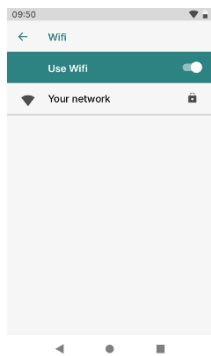


Select your
network.

Step 7

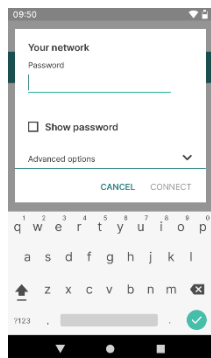

Enter your Wi-Fi
password and
press
<Connect> to
finish.

Step 8

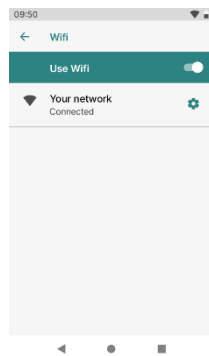

To get back to
the start screen
click the Android
<Back> key
three times. 

Switching between the communication types

As soon as a Wi-Fi is available in addition to a mobile data communication, Wi-Fi becomes the main communication type. If Wi-Fi is not available for transmitting transactions (availability 0%), the payment terminal switches automatically to 4G/LTE.